


Product Cut Sheet: Faux Wood Blinds

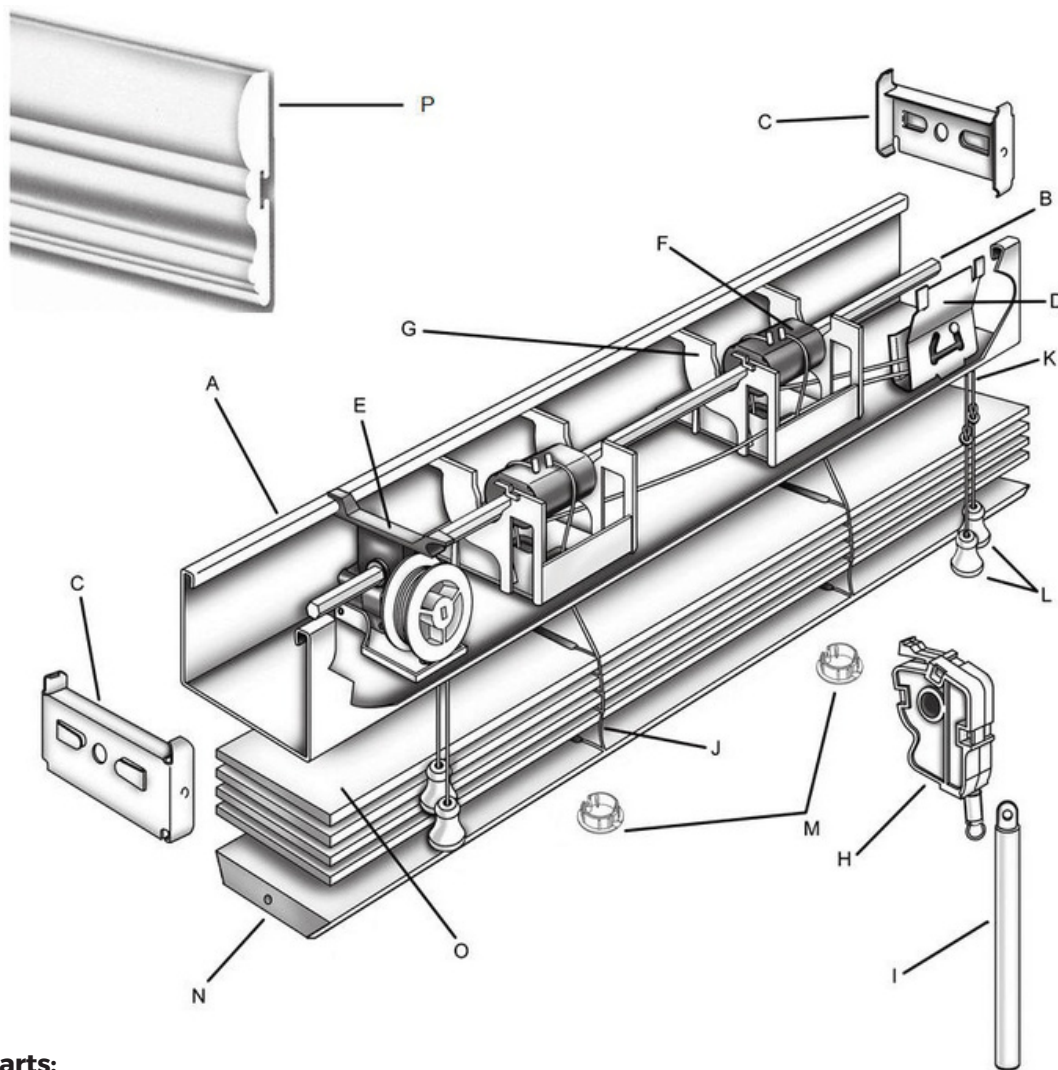

Parts:

- A) Low Profile Headrail – Steel
- B) Pinion Rod (Tilt Rod)
- C) Hexagonal End Stiffeners
- D) Cord Lock
- E) Cord Tilter
- F) Tape Drum (Ladder Drum)
- G) Tape Drum Support (Cradle)
- H) Wand Tilter
- I) Wand
- J) Cord Ladder
- K) Lift Cord 1.8mm
- L) Cord Tassels
- M) Bottomrail Plugs
- N) Bottomrail – Trapezoid
- O) Slats
- P) Royal Valance – Standard

System Features:

- Heavy Duty Metal and Plastic Components
- Cord Tilter has a metal gear offering a smooth and quiet rotation
- Wand Tilter has a metal gear and metal stem, making it the strongest tilter in the industry
- Trapezoid bottomrail allows for very tight slat closure when tilting
- All returns are mitered and glued
- Two-part hidden metal valance clip

Product Cut Sheet: Faux Wood Blinds

Blind (Material) Options:

Fauxwood Poly Vinyl Chloride (PVC) 2" or
2 1/2" Flat Basswood 2 or 2 1/2 Flat
2" Poly Vinyl Chloride(PVC) Solid Curved Smooth



Headrail:

- Polyester baked enamel – color coordinated
- Phosphate treated steel – 2" x 1 1/2" high
- Wall thickness – 0.018" (before paint)

Valance Options: *(Color Coordinated)*

- 2PVC – Single Slat Valance
- 3 1/4" Royal Valance for Fauxwood and Basswood
- 5 1/2" Barrington Valance upgrade option
 - Available in matching Fauxwood and Basswood colors
 - All Fauxwood blinds specifying Barrington Valances made from 100% Fauxwood materials
 - All painted Basswood blinds (white colors) specifying Barrington Valances made from 100% Fauxwood materials designed to match Basswood slat colors
 - All stained Basswood blinds specifying Barrington Valances made from natural wood
- Maximum width on a single valance = 9 ft.
- Valance will not be spliced
- A "flush-cut" on one end can be requested so that two valances can be butted together
 - Note that there will be a visible seam
- Valance Returns are included for all Inside Mount and Outside Mount Fauxwood and Basswood blinds
- Inside Mount Returns – 1 1/4" Long
- Outside Mount Returns – 3 1/2" Long
- Smallest Custom Return Size – 1 1/4"
- Inside Mount Returns – 1 1/4"
- Hidden 2-Part Metal Valance Clip

(Color Coordinated)

- Trapezoid shape for tight slat closure
- 2PVC Contoured Metal Bottomrail



Cord Ladder: *(Color Coordinated)*

- Polyester braided cord ladders are designed to ensure proper control with adequate overlap of slats when in the closed position
- Options include:
 - Standard
 - Routless
 - Cloth Tape (Privacy Ladder)
 - Vinyl Tape (Privacy Ladder)



Cord Ladder Spacing:

- Maximum spacing between rout holes:
 - Fauxwood and Basswood = 11"
 - Maximum distance between cord ladders on

Fauxwood blinds = 11" spacing

Basswood & PVC blinds = 20" spacing

Lift Cords:

(Color Coordinated)

- 1.8mm Polyester braided cords designed for lifting and lowering the blind

Mounting Hardware:

- Universal box brackets (color coordinated)
- Center supports on blinds wider than 60"
- Extension brackets (when requested)
- Hold down brackets (when requested)



Size Recommendations:

- Minimum Width – 9"
- Minimum Drop – 9"
- Maximum Width – 96"
- Maximum Drop – 96"

The sizes listed above are merely recommendations. Blinds may be ordered larger if required. Optional 2 or 3 blinds on a single headrail are available as well.

ShadeMonster
255 NE 59th St
Miami, FL 33137

Ph: (866) 206-8056
C: (786) 266-7375
www.shademonster.com



Product Cut Sheet: Faux Wood Blinds

Tilt Controls:



Cord Tilt Option

- Gear and housing of tilt mechanism are made of steel, allowing the acetal thermoplastic wheel to rotate smoothly and with minimal noise



Wand Tilt Option

- Gear and stem of tilt mechanism are made of steel, providing superior durability
- Worm and gear arrangement is entirely enclosed inside acetal thermoplastic housing
- 2 1/2" Fauxwood and Basswood blinds are not available with Wand Tilt option



Motorized Tilt Option

- RTS Tilt Battery Operated Motorized option available

Control Locations: *(Restrictions may apply)*


- Standard: Tilter – Left / Lift Cords – Right
- Reverse: Tilter – Right / Lift Cords – Left
- Same Left: Tilter – Left / Lift Cords – Left
- Same Right: Tilter – Right / Lift Cords – Right
- Blinds less than 11" in width must have center tilt mechanism with no lift control
- Blinds less than 15" and greater than 11 1/8" must have split controls (Standard or Reverse)
- Blinds greater than 15" may have same side or split controls

Lift Control:

- Snap-in design incorporates a stainless steel wear guard over which cords pass
- Incorporates "Crash Proof" safety feature that locks the blind automatically upon release of cords
- RTS Tilt Battery Operated Motorized option available

Other Headrail Channel Hardware:

- Headrail components are made of a combination of metal and low friction acetal thermoplastics
- Snap-in design of components allows for quick and easy repair if necessary



Cutout Specifications:

- The maximum cut in width is as follows:
 - Fauxwood = 4 1/2"
 - Basswood = 5 1/2"

Slats:

- Fauxwood
 - PVC Resin (base material), Methyltin Mercaptide (stabilizer), Calcium Carbonate (filler), Titanium Dioxide (UV inhibitor), Methyl Methacrylate (lubricant), Ethylenebis (lubricant), Octabenzene (UV inhibitor)
 - Lead Free
 - N.F.P.A. 701
- PVC
 - Chemical Family: Alloy, Chemical Name & Synonyms: Poly (vinyl chloride), PVC, vinyl, Formula: Vinyl Resin plus functional additives (CH₂CHCl)_n, C.A.S. Registry No: Not Applicable (Mixture), TSCA Inventory Status: All ingredients comply with USEPA's TSCA regulations
- Basswood
 - Made of 100% Basswood

Specialty Options:

- Standard L/R Controls (Cord Tilt only)
- 2-on-1 Headrail and 3-on-1 Headrail blinds
 - Light gap between blinds for 2-on-1 or 3-on-1 is 1/8"
 - Maximum size for multi-blind headrail is 144" and must be a 3-on-1
- Slanted Top "A" Frame Blinds